


NOTES:

1. CONTROL PANEL WITH NEMA 1 ENCLOSURE SHALL BE INSTALLED WHERE SHOWN.
2. STEEL BASIN COVER SHALL BE A GRATING WITH OPENINGS AS REQUIRED FOR DISCHARGE PIPING, INLET PIPING (SAME AS FOR EXISTING SUMP PIT) AND CONTROLS.
3. EACH PUMP SHALL BE AS FOLLOWS: 100 GPM, 30 FT HD, 1750 RPM, 1 1/2 HP, 460 VOLTS, 3 PH. 60 HZ., FEDERAL PUMP CORP. MODEL VSS-2120-112 - 4.

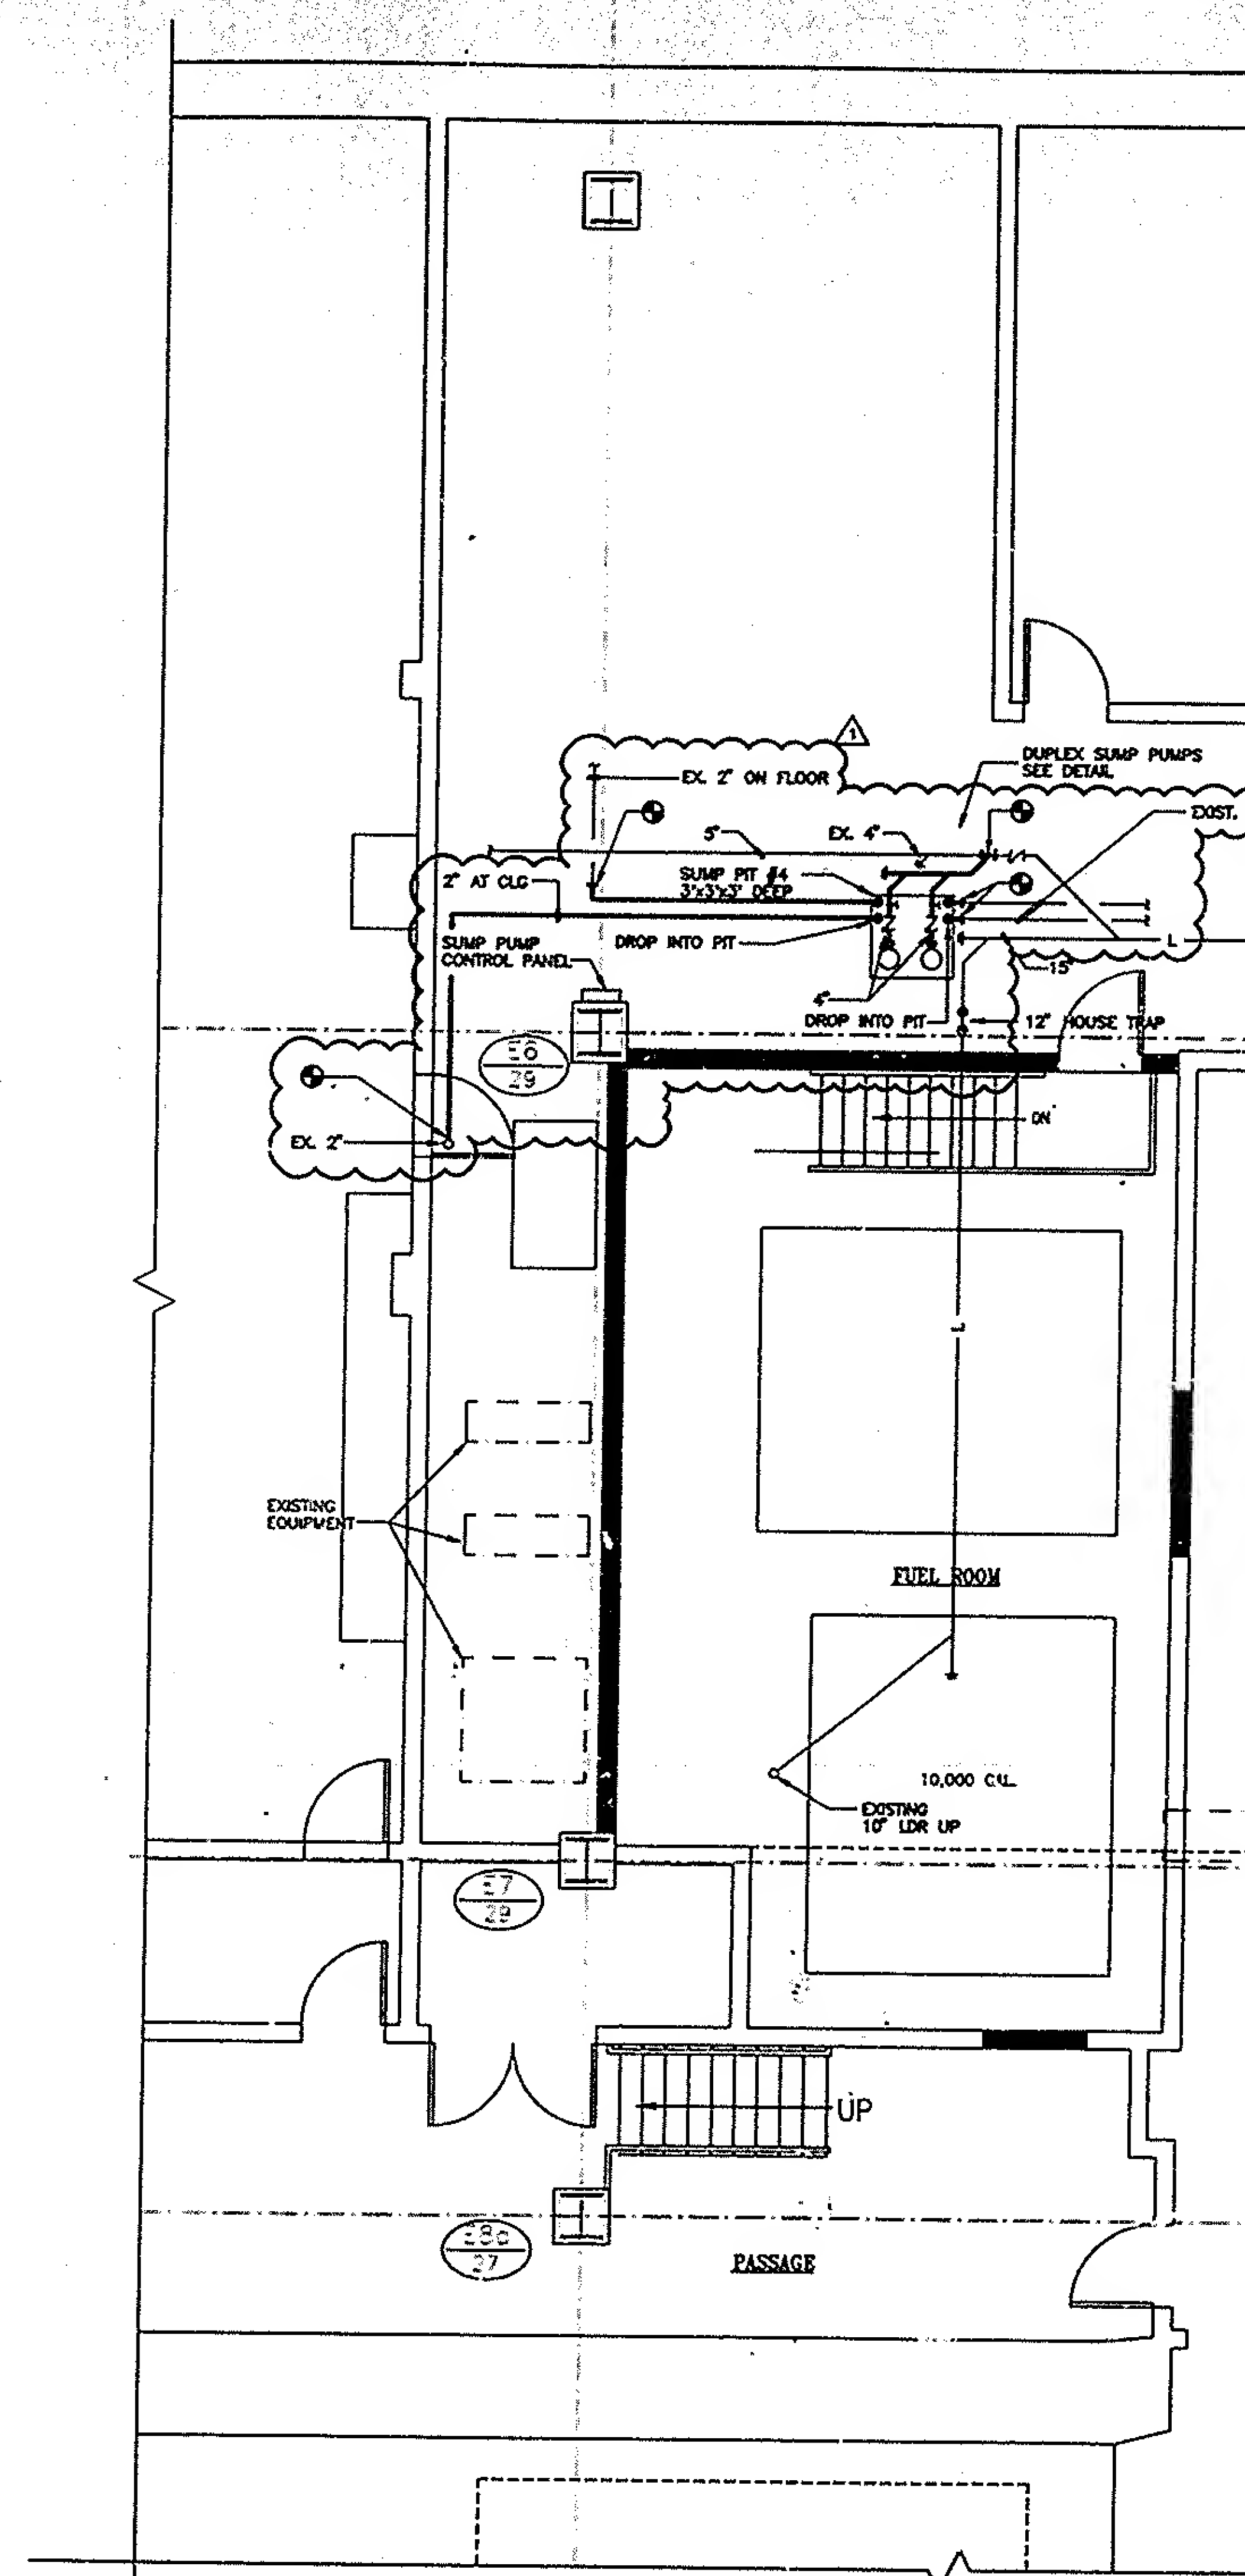

5 WTC PART PLAN B
FUEL OIL TANK R